

en

Clippard

Quality People.

»» Quality Products.

Pinch & Isolation Valves



Isolation Valves



NIV SERIES PTFE MEDIA ISOLATION VALVES

- *Ideal for use with corrosive media*
- *Low power consumption and fast response time*
- *Compact, lightweight design*
- *Minimal dead volume*
- *All wetted areas PTFE*

p. 3



NIV SERIES PTFE MEDIA ISOLATION MIXING VALVES

- *2/2 Normally-Closed*
- *Ideal for gradient, mixing, and diverting applications*
- *Compatible with corrosive fluids*
- *Variety of multi-valve configurations*

p. 4



NPV SERIES ELECTRONIC PINCH VALVES

- *Small, compact design*
- *Hygienic and easy to clean (replace tubes)*
- *Low power consumption*
- *High cycle life*
- *Able to handle whole blood and particulate matter*

p. 5 & 6



NPP SERIES PNEUMATIC PINCH VALVES

- *Small, compact design*
- *Hygienic and easy to clean (replace tubes)*
- *Low power consumption*
- *High cycle life*
- *Able to handle whole blood and particulate matter*

p. 6

PROBLEM

Many applications require the use of media that is not well suited for standard product materials. This application utilized a special media that was not only corrosive, but also exceptionally expensive. The customer sought a valve which could tolerate the media, but an emphasis was placed on minimizing volume as well in order to reduce the overall cost incurred with running the system.

SOLUTION

One of the primary benefits of Clippard's NIV series media isolation valves is that all wetted areas of the valve are constructed of PTFE, making the valve ideal for use with corrosive media. The valve also features minimal dead volume, which was especially important to this customer who was interested in conserving as much media as possible.

Considering the customer's underlying goal, Clippard proposed an alternative solution which involved the design of a special integrated manifold. The unique new design reduced potential leak points by eliminating the need for extra fittings and reduced the overall volume of media. Off the shelf, Clippard's isolation valve met the needs of this application. However, the extra effort proved more than worthwhile.

WHAT CAN CLIPPARD DO FOR YOU?

+32 10 45 2134



NIV SERIES MEDIA ISOLATION VALVES

2/2 & 3/2 N.O. & N.C. PTFE VALVES



Valve Type	2/2 Normally-Closed, 2/2 Normally-Open, 3/2 Selector/Diverter
Medium	Air, water, gas, or compatible fluids
Max. Coil Temp. Rating	70°C
Operating Pressure	Vacuum to 2 bar
Flow	10 to 60 l/min
Max. Pressure Range	710 mm Hg to 2 bar
Power Consumption	1.0 to 7.2 watts
Response Time	5 to 20 ms
Electrical Connections	450 mm wire leads
Voltage	12 or 24 VDC
Ports	#10-32, 1/4-28 or 1/8 NPS
Mounting	#2-56, #4-40, or manifold mount
Wetted Materials	PTFE
More Details	clippard.com/link/niv

The Clippard NIV series media isolation valve is a solenoid-operated device that uses a flexible diaphragm to isolate the actuation mechanism from the fluid path. Media isolation valves are commonly used for a wide variety of applications, including those that require precise, repeatable dispensing of media for analytical instrumentation. All wetted areas of the valve are PTFE, making this series ideal for use with corrosive media.


A unique feature of the NIV series is the one-piece valve stem that functions as a sealing membrane while also supporting and centralizing the poppet in the seating area. This multi-functional poppet/diaphragm/stem results in a simplified design with fewer parts, longer life, and minimal dead volume. Choose from four orifice sizes available as 2/2 Normally-Closed, 2/2 Normally-Open, or 3/2 Selector/Diverter. Special configurations available by request.

- Low power consumption
- Compact, lightweight design
- Bidirectional
- Minimal dead volume
- All wetted areas PTFE
- Ideal for use with corrosive media
- High cycle life
- Fast response time

Valve Type	Orifice Size	Ports	STANDARD STYLE		INTEGRATED MANIFOLD	
			12 VDC	24 VDC	12 VDC	24 VDC
2/2 Normally-Closed	1 mm	#10-32	NR1-2-12	NR1-2-24	NR1-2M-12	NR1-2M-24
	1,6 mm	1/4-28 UNF	NR2-2-12	NR2-2-24	NR2-2M-12	NR2-2M-24
	2,4 mm	1/4-28 UNF	NR3-2-12	NR3-2-24	NR3-2M-12	NR3-2M-24
	4 mm	1/8 NPS	NR4-2-12	NR4-2-24	NR4-2M-12	NR4-2M-24
2/2 Normally-Open	1 mm	#10-32	NR10-2-12	NR10-2-24	NR10-2M-12	NR10-2M-24
	1,6 mm	1/4-28 UNF	NR20-2-12	NR20-2-24	NR20-2M-12	NR20-2M-24
	2,4 mm	1/4-28 UNF	NR30-2-12	NR30-2-24	NR30-2M-12	NR30-2M-24
	4 mm	1/8 NPS	NR40-2-12	NR40-2-24	NR40-2M-12	NR40-2M-24
3/2 Selector/Diverter	1 mm	#10-32	NR1-3-12	NR1-3-24	NR1-3M-12	NR1-3M-24
	1,6 mm	1/4-28 UNF	NR2-3-12	NR2-3-24	NR2-3M-12	NR2-3M-24
	2,4 mm	1/4-28 UNF	NR3-3-12	NR3-3-24	NR3-3M-12	NR3-3M-24
	4 mm	1/8 NPS	NR4-3-12	NR4-3-24	NR4-3M-12	NR4-3M-24

NIV SERIES GRADIENT MIXING VALVES

2/2 N.C. PTFE MIXING VALVES

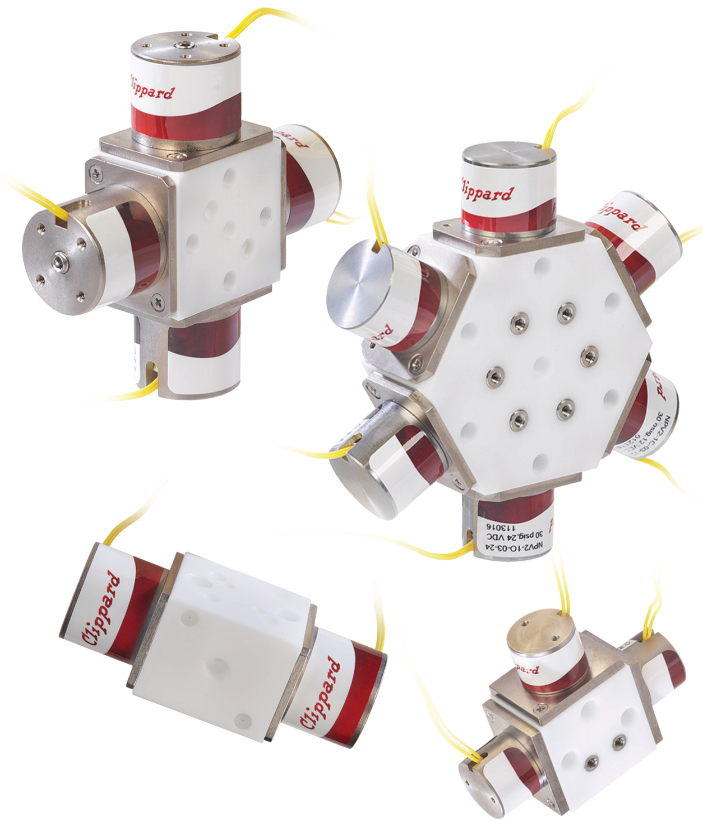

NIV series mixing valves feature multiple solenoids connected around a central body. This unique design provides significant reduction in internal volume with enhanced mixing capabilities. Each actuator operates independently, allowing for flow of various media to be mixed or for one media to be split into multiple streams.

These valves utilize a standard 2/2, Normally-Closed configuration. Standard options include four different orifice sizes, available in 12 or 24 VDC.

- Ideal for gradient, mixing, and diverting applications
- Compatible with corrosive fluids
- Variety of multi-valve configurations


Valves	Orifice Size	Ports	12 VDC	24 VDC
2	1 mm	#10-32	NR1-2-12-G2	NR1-2-24-G2
	1,6 mm	1/4-28 UNF	NR2-2-12-G2	NR2-2-24-G2
	2,4 mm	1/4-28 UNF	NR3-2-12-G2	NR3-2-24-G2
	4 mm	1/8 NPS	NR4-2-12-G2	NR4-2-24-G2
3	1 mm	#10-32	NR1-2-12-G3	NR1-2-24-G3
	1,6 mm	1/4-28 UNF	NR2-2-12-G3	NR2-2-24-G3
	2,4 mm	1/4-28 UNF	NR3-2-12-G3	NR3-2-24-G3
	4 mm	1/8 NPS	NR4-2-12-G3	NR4-2-24-G3
4	1 mm	#10-32	NR1-2-12-G4	NR1-2-24-G4
	1,6 mm	1/4-28 UNF	NR2-2-12-G4	NR2-2-24-G4
	2,4 mm	1/4-28 UNF	NR3-2-12-G4	NR3-2-24-G4
	4 mm	1/8 NPS	NR4-2-12-G4	NR4-2-24-G4
6	1 mm	#10-32	NR1-2-12-G6	NR1-2-24-G6
	1,6 mm	1/4-28 UNF	NR2-2-12-G6	NR2-2-24-G6
	2,4 mm	1/4-28 UNF	NR3-2-12-G6	NR3-2-24-G6
	4 mm	1/8 NPS	NR4-2-12-G6	NR4-2-24-G6

Valve Type	2/2 Normally-Closed
Medium	Air, water, gas, or compatible fluids
Max. Coil Temp. Rating	70°C
Operating Pressure	Vacuum to 2 bar
Flow	10 to 60 l/min
Max. Pressure Range	710 mm Hg to 2 bar
Power Consumption	1.0 to 7.2 watts
Response Time	5 to 20 ms
Electrical Connections	450 mm wire leads
Voltage	12 or 24 VDC
Ports	#10-32, 1/4-28 or 1/8 NPS
Mounting	#2-56, #4-40, or manifold mount
Wetted Materials	PTFE
More Details	clippard.com/link/niv

Available with two, three, four, and six valves, these units provide a compact solution for applications requiring an inert wetted path for corrosive or aggressive liquids. Special configurations available by request.

ELECTRONIC NPV SERIES PINCH VALVES

2/2 & 3/2 VALVES WITH DISPOSABLE TUBING

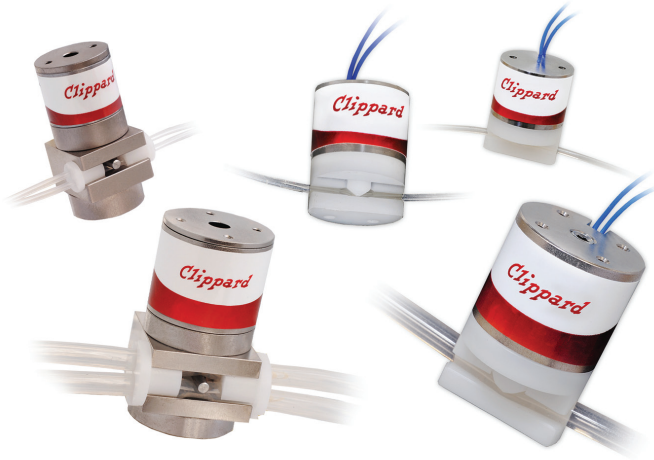

- Small, compact design
- Hygienic and easy to clean (replace tubes)
- Low power consumption
- High cycle life
- Can handle whole blood and particulate matter
- Unobstructed flow path
- Each valve comes with 300 mm of silicone tubing, pre-installed
- Choose from a large variety of easily replaceable tubing

All NPV Series pinch valves ship with 300 mm of high quality silicone tubing pre-installed. Standard options include medical/laboratory grade or FDA approved food grade silicone tubing. Custom valve configurations and additional tubing options are available (consult factory).

Valve Type	2/2 Normally-Open or Normally-Closed 3/2 (one tube N.O., one tube N.C.)
Medium	Air, water, gas, or compatible fluids
Max. Pressure Range	1,4 to 2 bar*
Power Consumption	1.0 to 7.2 watts
Electrical Connections	450 mm wire leads
Voltage	12 or 24 VDC
Mounting	#2-56, #4-40
Wetted Materials	Silicone tubing
More Details	clippard.com/link/npv

*With standard medical/laboratory grade silicone tubing

The Clippard NPV series pinch valve is a solenoid-operated device that is designed to open and close tubes for controlling flow of liquids and gases. Other valve types have internal passages that may cause small amounts of fluid to remain in the valve. Pinch valves have no areas or dead volume where fluid can become trapped. Only the inside of the tubing contacts the fluid. Energizing the solenoid retracts or extends the plunger, which opens or closes the tube. De-energizing the solenoid will allow the plunger to return to its original state.

NPV Series pinch valves are available with one tube or two tubes. The single tube versions function as standard “on/off” 2/2 valves and are available in Normally-Open or Normally-Closed. The two tube versions feature one Normally-Open tube and one Normally-Closed tube, allowing them to function as 3/2 valves.

Tubing Type	Max. Pressure	Power	Model	1 Tube N.C.	1 Tube N.O.	2 Tubes	I.D.	O.D.	Wall
Medical/ Laboratory Grade Silicone Tubing	2 bar	1 W	NPV1	NPV1-1C-01-□	NPV1-1O-01-□	NPV1-2D-01-□	0.030"	0.065"	0.0175"
		1.5 W	NPV2	NPV2-1C-02-□	NPV2-1O-02-□	NPV2-2D-02-□	1/32"	3/32"	0.0313"
				NPV2-1C-03-□	NPV2-1O-03-□	NPV2-2D-03-□	1/16"	1/8"	0.0313"
	1,4 bar	4.2 W	NPV3	NPV3-1C-04-□	NPV3-1O-04-□	NPV3-2D-04-□	1/16"	3/16"	0.0625"
				NPV3-1C-05-□	NPV3-1O-05-□	NPV3-2D-05-□	1/8"	1/4"	0.0625"
		7.2 W	NPV4	NPV4-1C-06-□	NPV4-1O-06-□	NPV4-2D-06-□	3/16"	5/16"	0.0625"
NPV4-1C-07-□	NPV4-1O-07-□			—	1/4"	3/8"	0.0625"		
Sanitary Food Grade Silicone Tubing	1 bar	1.5 W	NPV2	NPV2-1C-23-□	NPV2-1O-23-□	NPV2-2D-23-□	1/16"	1/8"	0.0313"
		4.2 W	NPV3	NPV3-1C-25-□	NPV3-1O-25-□	NPV3-2D-25-□	1/8"	1/4"	0.0625"
	0,6 bar	7.2 W	NPV4	NPV4-1C-27-□	NPV4-1O-27-□	—	1/4"	3/8"	0.0625"

PNEUMATIC NPP SERIES PINCH VALVES

2/2 MINIATURE VALVES WITH DISPOSABLE TUBING



Clippard’s NPP series miniature pneumatic pinch valves are air-piloted devices designed to open or close tubes for controlling flow of liquids and gases. Other valve types have internal passages that may cause small amounts of fluid to remain in the valve. Pinch valves have no areas of dead volume where fluid can become trapped. Only the inside of the tubing has contact with the fluid. The NPP series functions as a standard "on/off" 2/2 valve and is available in Normally-Open or Normally-Closed versions.

Pinch valves are especially well-suited for applications which benefit from a disposable flow path. Common industries that utilize pinch valves for isolating fluid from a mechanical valve include: drug dispensing, laboratory equipment, wastewater, medical devices, chemical, food and beverage equipment, ceramic/glass/plastic, and solids handling.

Valve Type	2/2, Normally-Open & Normally-Closed
Medium	Air, water, gas, or compatible fluids
Max. Pilot Pressure	17 bar
Tubing Pressure	See chart below
Mounting	#4-40
Temperature Range	0 to 110°C
Wetted Materials	Medical or food grade silicone, or polyurethane
More Details	clippard.com/link/npp

- Small, compact design
- Hygienic and easy to clean (replace tubes)
- Low power consumption
- High cycle life
- Can handle whole blood and particulate matter
- Unobstructed flow path
- Each valve comes with 300 mm of silicone tubing, pre-installed
- Choose from a large variety of easily replaceable tubing

All NPP Series pinch valves ship with 300 mm of high quality tubing pre-installed. Standard options include medical/laboratory grade or FDA approved food grade silicone tubing, or polyurethane tubing. Custom valve configurations and additional tubing options are available (consult factory).

Tubing Type	Tubing Max. Pressure	1 Tube N.C.	Min. to Open*	1 Tube N.O.	Min. to Close*	I.D.	O.D.	Wall
Medical/ Laboratory Grade Silicone Tubing	2 bar	NPP2-1C-03	2 bar	NPP2-1O-01	1 bar	1/16"	1/8"	0.0313"
		NPP2-1C-04		NPP2-1O-02	2,8 bar	1/16"	3/16"	0.0625"
	1,4 bar	NPP4-1C-05	1,4 bar	NPP3-1O-05	0,7 bar	1/8"	1/4"	0.0625"
		NPP4-1C-06		NPP4-1O-06		3/16"	5/16"	0.0625"
		NPP4-1C-07		NPP4-1O-07		1/4"	3/8"	0.0625"
Polyurethane Tubing	7 bar	NPP2-1C-13	4,5 bar	NPP2-1O-13	3,5 bar	1/16"	1/8"	0.0313"
		NPP2-1C-15		NPP4-1O-15	3 bar	1/32"	3/32"	0.0313"
Sanitary Food Grade Silicone Tubing	1 bar	NPP2-1C-23	2 bar	NPP2-1O-23	1 bar	1/16"	1/8"	0.0313"
		NPP3-1C-25	1,4 bar	NPP4-1O-25		1/8"	1/4"	0.0625"
	0,6 bar	NPP4-1C-27			NPP4-1O-27	0,7 bar	1/4"	3/8"

*With max. pressure in tubing.

Clippard

Distributed by

Clippard Europe S.A.
Parc Scientifique Einstein
Rue du Bosquet, 6
1348 Louvain-La-Neuve
Belgium
TEL +32 10 45.21.34

www.clippard.eu

Clippard Instrument Laboratory, Inc.
7390 Colerain Ave.
Cincinnati
Ohio 45239
USA
TEL +1 513.521.4261

www.clippard.com